thermoscientific



RadEye SPRD-ER Spectroscopic Personal Radiation Detector





Whatever your mission, the SPRD-ER has you covered

The Thermo Scientific™ RadEye™ SPRD-ER personal radiation detector simplifies your mission. By providing significant detector sensitivity for search and find, combined with accurate high radiation dose rate measurement, the SPRD-ER is suitable for all users and may be the only radiation device you need. Additionally, the SPRD-ER identifies the nature of the discovered material in a manner configurable for your operation or user skills – from simple artificial vs. natural distinction; to industrial, SNM, and medical classification; to full spectroscopic analysis.

Ensure safety - extremely high dose rate measurement and accuracy

- Extremely high dose rate measurement capabilities of ≤1000 R/h (<10 Sv/h) supports users with one unit for search, find, identification and response missions.
- Unprecedented dose rate accuracy across the full spectrum of 58 keV - 6 MeV
- New highly sensitive alarm for artificial gamma (S-Alarm) extra sensitivity in the range of 90 - 450 keV for effective detection of SNM materials
- Sourceless detector gain stabilization improves identification selectivity and accuracy across the spectrum in varying environmental conditions.

Stay on mission - detect radiation at greater distances

Advanced NBR identifies artificial radiation while minimizing false alarms

Respond swiftly - faster discrimination and adjudication of potential threats

- (SNM, Industrial) and non-threat sources (medical or natural)
- Neutron indication via proven prompt gamma analysis


Effortless deployment

- Simplified ID capability for novice to advanced users
- Multiple modes of operation, easily configured to best align with radiation detection operating procedures



Easy information. Smarter decisions.

- Large display with improved screen resolution and brightness
- No retraining or relearning for infrequent users
- Get results automatically, without the need to press buttons
- Quickly guides you through next steps after an alarm
- Simple 4 button design
- Comprehensive data neatly organized and presented on screen
- Bluetooth[™] integration with iOS[™] and Android[™] devices
- RadResponder iOS and Android phone apps compliant
- Easy-to-use configuration tool for small and large organizations
- No license required field test adapter for performance and measurement verification

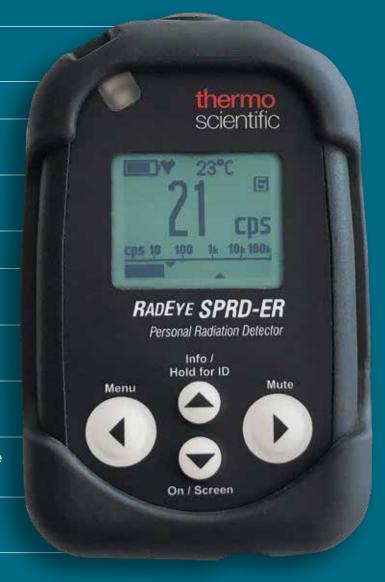




Ease of use


Configure the RadEye SPRD-ER as a simple 0 to 9 radiation level gauge. Or turn on dose rate readings, simplified gamma ID classification, or full spectroscopic capabilities.

Agencies have seen nuisance alarms reduced by 80% as a result of concentrated NORM materials such as granite, natural stone and subway tiles after deploying instruments that utilize our Natural Background Rejection (NBR) Technology.

The patented Natural Background
Rejection algorithm (NBR), allows
the RadEye SPRD-ER to immediately
separate man-made (non-NORM)
gamma radiation from natural
background fluctuations in real-time
during operation. When enabled,
the RadEye SPRD-ER automatically
classifies and identifies gamma radiation
as a result of an NBR alarm.

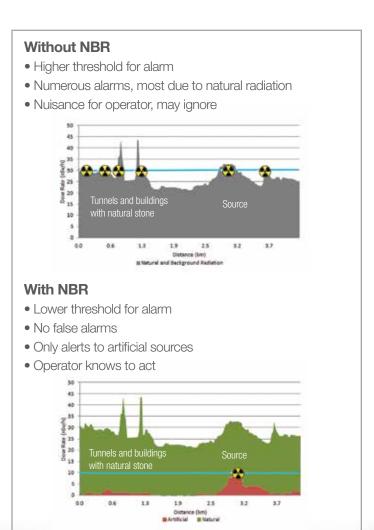



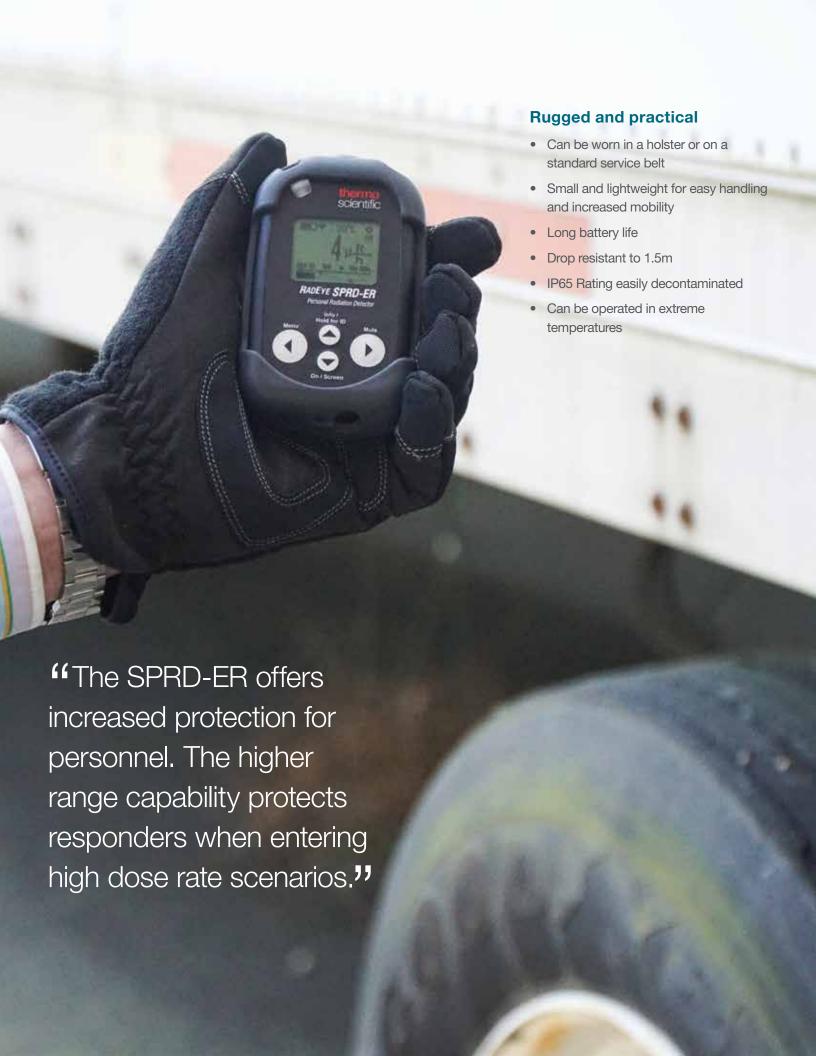



RadEye SPRD-ER Specifica	tions	
Radiation detected and analyzed		Gamma and X-rays plus neutrons via prompt gamma
Number of detectors		2
Low dose rate / Search / ID d	etector	
Material		CsI(TI)
Sensitivity (662 keV)		200 cps per μSv/h
Spectroscopic energy range		20 keV - 3 MeV
Typical ID-time at 1 μSv/h (100 μR/h)		< 3 min
Energy range		58 keV to 6 MeV
Dose rate range		10 nSv/h - 250 μSv/h (1 μR/h - 25 mR/h)
NBR (Natural Background Rejection)		Advanced algorithms
Neutron detection and verification		Prompt gamma analysis
Continuous Gain Stabilization		Sourceless spectral algorithm
Fast Gain Verification and Adjustment		Lutetium Testadapter (< 10 nCi Lu-176)
High dose rate detector (pate	nt pending)	
Material		Scintillator
Sensitivity (662 keV)		25 cps per mSv/h (0.25 cps per mR/h)
Energy range		58 keV to 6 MeV
Dose rate range		250 μSv/h - 10 Sv/h (25 mR/h - 1000 R/h)
General Specifications		
Battery type		2 x AAA alkaline or NiMH
Battery Life		> 170 h (alkaline)
Weight including Batteries and Rubber Sleeve		195g
Water/Dust Rating		IP 65
Drop tested		1.5 m on concrete (with rubber sleeve)
Operating Temperature		-4°F to 122°F (-20°C to 50°C)
Dimensions		4.1 x 2.6 x 1.6 inches (with rubber protective sleeve)
Wireless Communications		Bluetooth 4.2 (Option)
Wired Communications		USB to IR
Standards Compliance	Low dose rate range	ANSI N42.32 PRD standard fully compliantANSI N42.48 SPRD standard fully compliant
	High dose rate range	ANSI N42.33 for high range dose rate detector IEC 60846-1 for high range dose rate detector
Ordering information		
4250825 Rac	RadEye SPRD-ER personal radiation detector	
	RadEye SPRD-ER-KIT, contains 1 ea. RadEye SPRD-ER, Lutetium Test Adapter, Desktop Holder + USB connectio cable, Software package RadEye.exe + RadEyeSpectra, Holster and spare AAA batteries	
	Radeye SPRD-ER Vehicle Kit, contains 1 ea. RadEye SPRD-ER, Lutetium Test Adapter, Vehicle charging kit, Bluetooth adapter, Software package RadEye.exe + RadEyeSpectra, Holster and spare AAA rechargeable batterie	



